




STRUCTURED
CABLING PARTNER

LC FIBER OPTIC ADAPTER

OPTIPLUS LC simplex/duplex adapters meet the growing demand for small form factor, high-density singlemode and multimode fiber optic connectivity. Optiplus ceramic sleeves LC adaptors are available in different colours with options for flange or flangeless body and metal.

Features:

- TIA/EIA-568-C.3
- TIA/EIA-604
- FOCIS-3

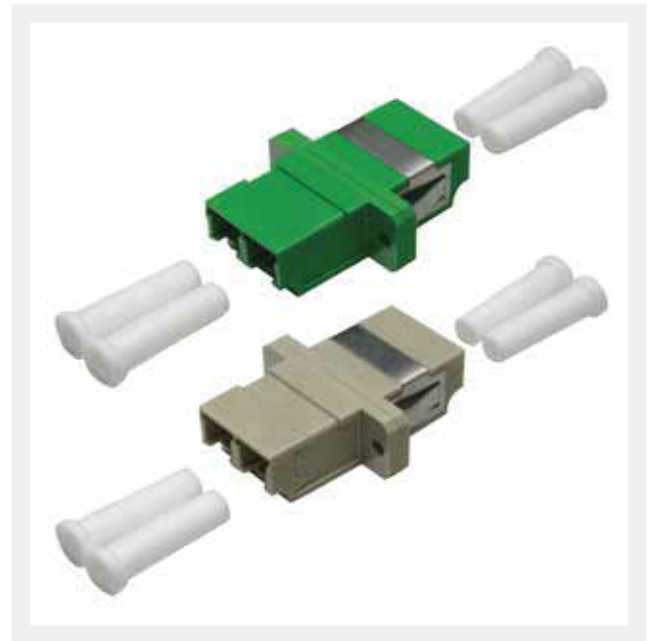

Design and Materials:

Adapter Material	Plastic-UL94V-0
Adapter Sleeve	Phosphor Bronze or Zirconia Ceramic
Operating Temperature	-40 - +85°C
Storage Temperature	-40 - +85°C
Storage Temperature	-20 - +60°C

Ordering Information:

PART NUMBER	DESCRIPTION
OP-LC-XXD15 APC	LC DUPLEX ADAPTER
OP-LC-XXD15 UPC	LC DUPLEX ADAPTER
OP-LC-XXD15	LC DUPLEX ADAPTER

Ordering Guide:

PART NUMBER	DESCRIPTION
JACKET	FIBER TYPE (XX)
LSZH	BM = 50/125 OM2 Multimode CM = 50/125 OM3 Multimode ES = 9/125 OS2 Singlemode



Optiplus Networks LLC

7950 NW 53RD Street, Suite 337,
Miami, FL.US 33166

Email: info@optiplusnetworks.com

Tel: +1 7868 716663

www.optiplusnetworks.com